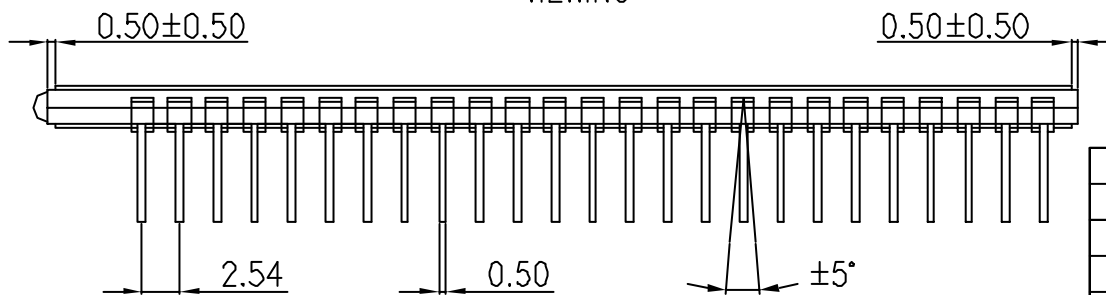

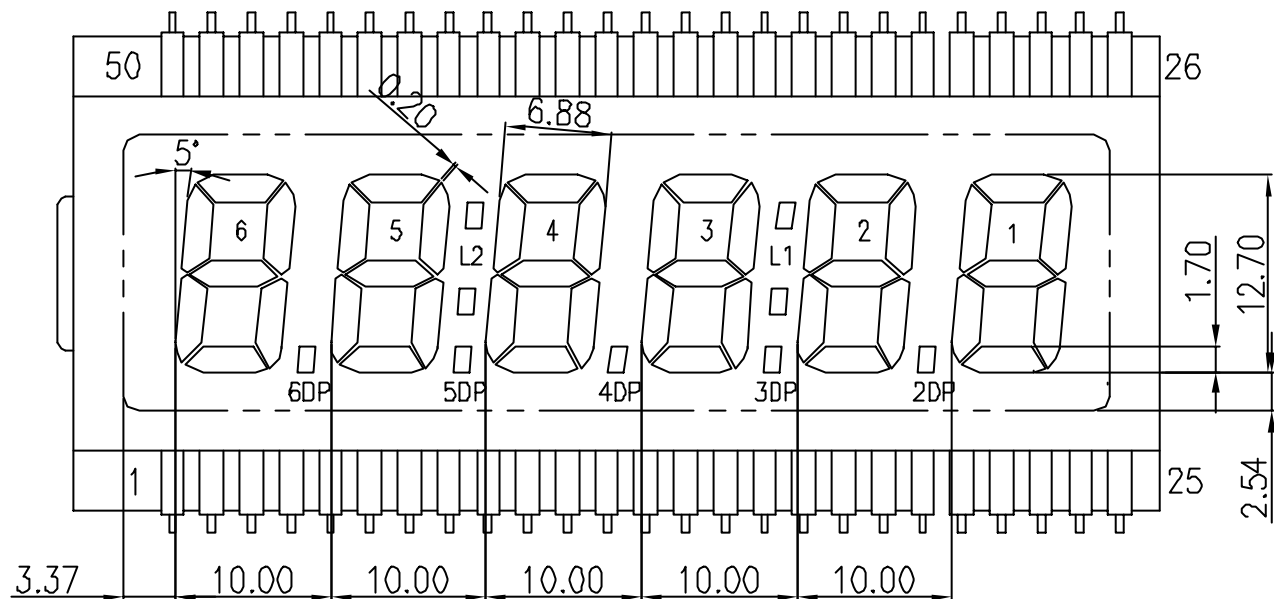

 DIRECTION
 6:00
 VIEWING



1				
REV.	MODIFY CONTENT			DATE
DWN	Bawing	UNIT	mm	CUST. MODEL
CKD		SCALE		MODEL M271204/C(6.35)BR1G
APPD			DATE	JAN-31-05
ALL SHORE INDUSTRIES, INC				NAME M271204
				PAGE 1/2



	COM		COM
1	COM	26	1A
2	6E	27	1F
3	6D	28	1G
4	6C	29	2B
5	6DP	30	2A
6	5E	31	2F
7	5D	32	2G
8	5C	33	L1
9	5DP	34	3B
10	4E	35	3A
11	4D	36	3F
12	4C	37	3G
13	4DP	38	4B
14	3E	39	4A
15	3D	40	4F
16	3C	41	4G
17	3DP	42	L2
18	2E	43	5B
19	2D	44	5A
20	2C	45	5F
21	2DP	46	5G
22	1E	47	6B
23	1D	48	6A
24	1C	49	6F
25	1B	50	6G

NOTE:

1. TN TYPE
2. DRIVING METHOD: STATIC
3. OPERATING VOLTAGE: 3.0~5.0 V
4. OPERATING TEMP: -0 ~ 50°C
5. STORAGE TEMP: -10 ~ 60°C
6. VIEWING DIRECTION: 6:00
7. POLARIZER MODE: REFLECTIVE POSITIVE
8. CONNECTION: PIN TYPE
9. DIMENSIONS ARE IN MILLIMETERS AND UNLESS OTHERWISE NOTED ARE ±0.20MM

1				
REV.	MODIFY CONTENT			DATE
DWN	Bauing	UNIT	mm	CUJST. MODEL
CKD		SCALE		MODEL M271204/C(6.35)BR1G
APPD		⊕		DATE JAN-31-05
ALL SHORE INDUSTRIES, INC				NAME M271204
				PAGE 2/2