


 DIRECTION
6:00
VIEWING

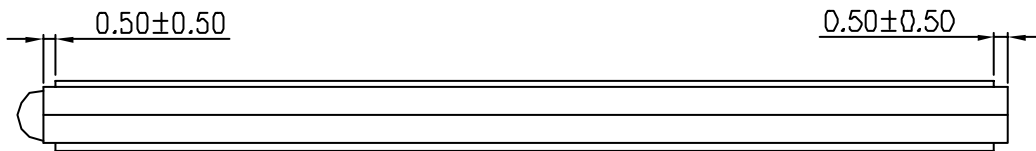

| | | | | |
|------|----------------|---|------|---------------------|
| 1 | | | | DATE |
| REV. | MODIFY CONTENT | | | |
| DWN | Bauing | UNIT | mm | CUST. MODEL |
| CKD | | SCALE | | MODEL MCD-815/Z8R1G |
| APPD | |  | DATE | FEB-02-05 |

ALL SHORE INDUSTRIES, INC NAME MCD-815
 PAGE 1/2

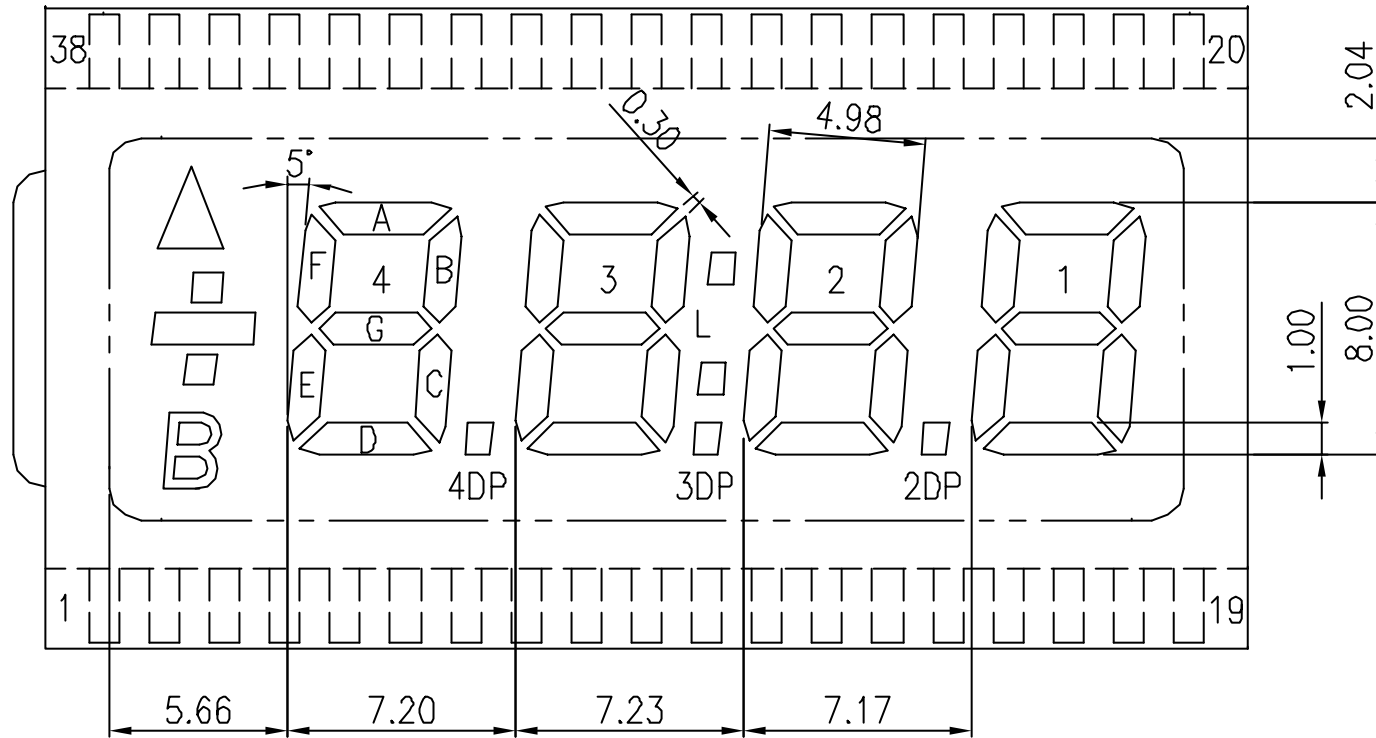

| | | | |
|----|-----|----|-----|
| | COM | | COM |
| 1 | COM | 20 | 1B |
| 2 | B | 21 | 1A |
| 3 | 4E | 22 | 1F |
| 4 | 4D | 23 | 2G |
| 5 | 4C | 24 | 2B |
| 6 | 4DP | 25 | 2A |
| 7 | 3E | 26 | 2F |
| 8 | 3D | 27 | L |
| 9 | 3C | 28 | 3G |
| 10 | 3DP | 29 | 3B |
| 11 | 2E | 30 | 3A |
| 12 | 2D | 21 | 3F |
| 13 | 2C | 32 | 4G |
| 14 | 2DP | 33 | 4B |
| 15 | 1E | 34 | 4A |
| 16 | 1D | 34 | 4F |
| 17 | 1C | 36 | □ |
| 18 | 1G | 37 | ▤ |
| 19 | . | 38 | △ |

NOTE:

1. TN TYPE
2. DRIVING METHOD: STATIC
3. OPERATING VOLTAGE: 5.0 VOP
4. OPERATING TEMP: -0° ~ 50°C
5. STORAGE TEMP: -5° ~ 55°C
6. VIEWING DIRECTION: 6:00
7. POLARIZER MODE: REFLECTIVE POSITIVE
8. CONNECTION: ZEBRA TYPE
9. DIMENSIONS ARE IN MILLIMETERS AND UNLESS OTHERWISE NOTED ARE ±0.20MM

| | | | | |
|----------------------------------|----------------|-------|----|---------------------|
| 1 | | | | |
| REV. | MODIFY CONTENT | | | DATE |
| DWN | Bauing | UNIT | mm | CUST. MODEL |
| CKD | | SCALE | | MODEL MCD-815/Z8R1G |
| APPD | | ⊕ | | DATE FEB-02-05 |
| ALL SHORE INDUSTRIES, INC | | | | NAME MCD-815 |
| | | | | PAGE 2/2 |